


Structure, Laminated wood: scandinavian laminated pine wood treated in autoclave Class IV. Finished with two layers of Lasur paint. In case of being subjected to bad weather conditions, laminated pine wood can present some tiny cracks on the surface that do not reduce its durability at all. As regards resin and knots, please note that these are part of its natural appearance.

Ref.	A	B	H	H1
JV02/T	2000	168	750	600

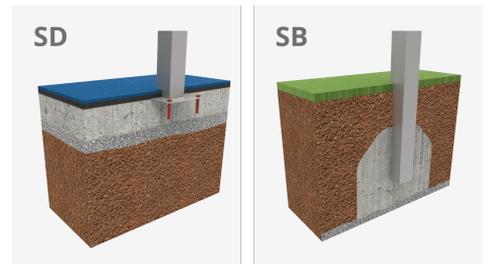

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [HD image](#)

Materials:

Fixings: Electro galvanised and 8.8 DIN267, AISI-304 stainless steel screws.

Anchoring: in hard ground with a stainless steel anchoring system in or embedded 100mm in concrete. In soft ground buried 500mm.

- None of the materials requires a specific treatment for its disposal.
- If the product is subject to severe use, maintenance should be increased.
- Don't use the product before the installation/maintenance is ready.
- Please check the maintenance instructions.

Ground anchoring screws not included.