


ALMS60

Luminaire MILAN S 60

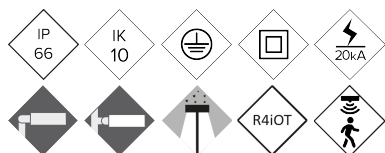

Aerodynamic and flat LED luminaire with low wind resistance. Comprehensive range available in five sizes with extensive optical and light distributions from 20W up to 300W to cover all road applications. High efficiency, reliability and quality, allowing quick return on investment. Ready for any intelligent lighting control solutions.


MAIN FEATURES:

- High efficiency. Up to 145 lm/W net
- 5 different sizes. From 20W to 300W
- Double compartment: driver and LED module
- Tool-less opening
- 18 light distribution curves
- Zhaga Standard (Book 15)
- Ready 4IoT. Ready for any intelligent lighting control solution


APPLICATIONS:

- Roads and Motorways
- Urban Roads and Streets
- Pedestrian Crossings
- Bicycle Lanes and Narrow roads
- Rural Roads
- Architectural; Buildings and Monuments


DETAILS:

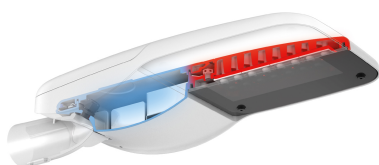

Double compartment.

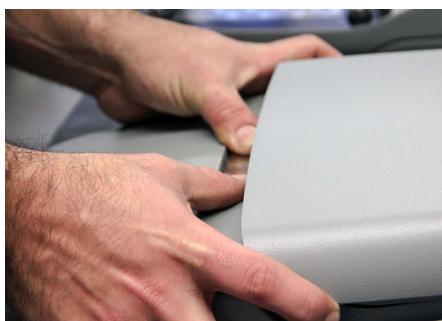

Tool-less top opening.

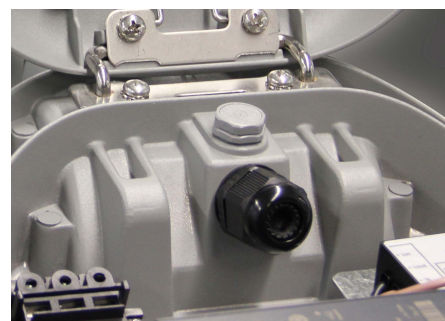

Anti-condensation valve .

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [Mounting instructions](#) | [HD image](#)


BENITO

info@benito.com
tel. 93 852 1000

SPECIFICATIONS :

Housing material:	High pressure die-cast aluminium EN AC-43000, EN AC-43100, EN AC-43400, EN AC-44100, EN AC-47100 according to the UNE EN 1706 standard
Diffuser (optic system enclosure):	5mm tempered safety glass, filters UV. Optionally in polycarbonate.
Fixing elements:	Stainless steel 18/8 - AISI 304
Housing:	Double compartment: driver / LED module
Sealing gaskets:	Silicone foam
IP rating (luminaire):	IP66
IP rating (optic system):	IP66
IK rating (impact resistance):	IK09 - IK10
LEDs thermal dissipation:	Thermal dissipation through finless luminaire body, without conductive fluids. Passive convection dissipation ensuring thermal contact with the LED modules through a high-conductivity thermal transfer material
Anti-condensation valve:	Pressure-balancing valve to ensure moisture release, avoid condensation and maintain the luminaire IP tightness
Paint and finishes:	Polyester powder paint coating, electrostatically sprayed and sublimated in the oven. Resistant to corrosion
Colour:	RAL 9022. Optional: other colours
Mounting:	Post-Top Ø60mm (Optional; Ø76mm and by means of accessories Ø48mm)
Tilt range:	From -15° to +15°
Maintenance:	Easy, tool-less opening. Modular concept for easy component replacement: LEDs, drivers, SPD
Recommended mounting height:	6 - 9 m
Driver:	Constant current adjustable and programmable driver on different levels (0-10V, 1-10V, DALI2, NFC). Embedded in the luminaire, pre-wired on a galvanised steel plate.
Flow Reduction:	Double level with control line, autonomous multi-level dimming or virtual midnight, flow reduction at the head-end.
Ready4IOT - Connectivity:	Zhaga Base (Book 18) - D4i. (Optional). NEMA 5,7 Pins Base (Optional). Bottom side Presence Sensor on Zhaga Base (Book 18) - D4i. (Optional).
Surge protection device (SPD):	Type T2+T3, 10kV and 20kA transient surge protector. Series connection with thermofuse, disconnection for a more effective protection at the end of the SPD service life. (Optional SPD Full Permanent Surge Protector >264Vac to <170Vac).

DRAWING:

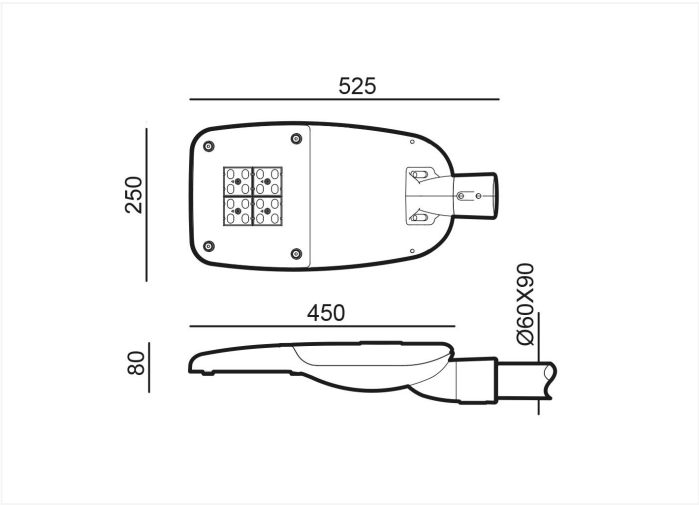

INSTALLATION:




V. 2024-02-23 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.


TECHNICAL DATA:

	REF.	N° LEDs	Power W	I Driver mA	Real luminous flux (T) =85°C)		Initial luminous flux (T) =25°C)	
					Flux lm	Efficacy lm/W	Flux lm	Efficacy lm/W
Milan S	ALMS60	24	40	500	5680	142	6475	162
		24	50	625	7090	142	8083	162
		24	60	750	8443	141	9625	160

Luminous flux and efficiency at 4000°K and CRI>70.
Luminous flux tolerance < +/-3%.
Values may be subject to changes due to LED binning.

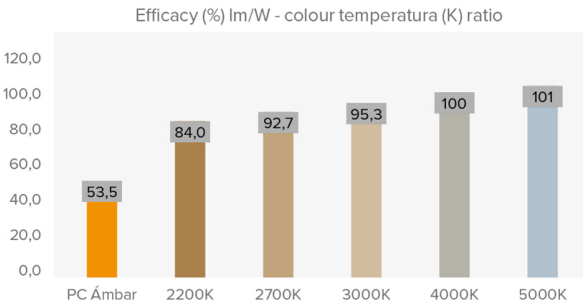

PHOTOMETRY:

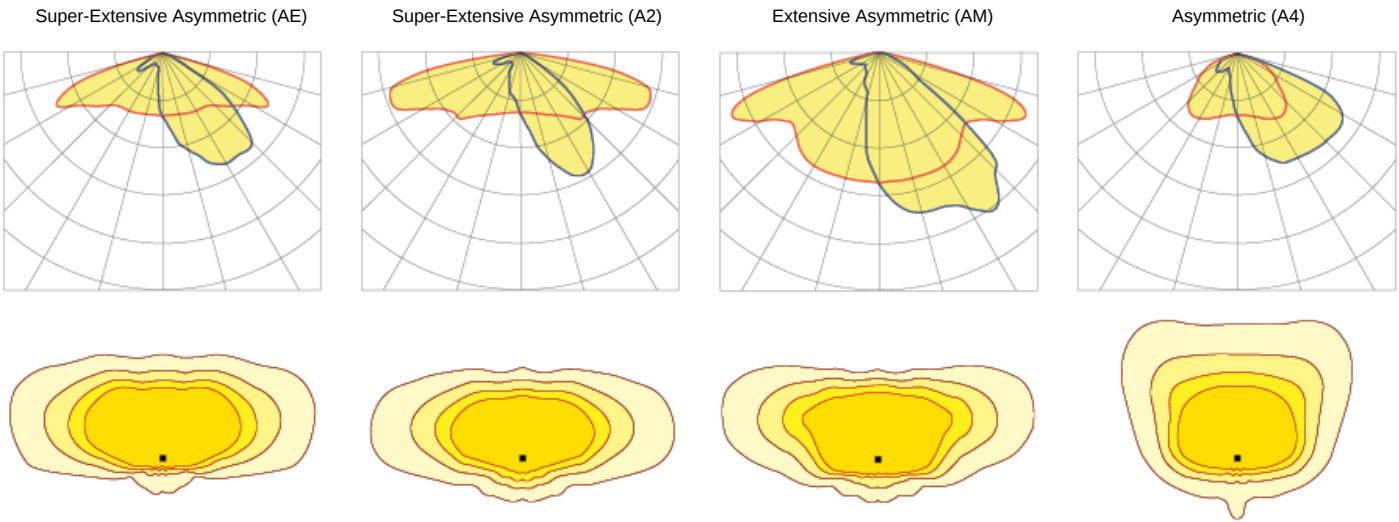

*Show 4 recommended lighting distributions. Refer to the 18 typologies.

V. 2024-02-23 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

LEDs MODULE:

LEDs module:	BENITO Zhaga standard with 8 and 12 LEDs. Check colour temperatures, CRI and Luminous distributions (Optional NTC temperature probe).		
Replaceable module:	Yes		
LED:	5050		
Number of LEDs:	16 - 24		
PCBs format:	3 Zhaga (Book 15) 2x4 or 2 Zhaga (Book 15) 2x6		
LED nominal efficacy:	172		
Colour temperature:	PC Amber - 1K8, 2K2, 2K7, 3K, 4K, 5K		
Colour rendering index CRI:	>70 (optional >80)		
Average LED useful time L90B10:	L90B10 >100,000 hours		

OPTIC SPECIFICATIONS:

Optic system:	PMMA lenses 2x2		
Light distributions:	18 light distribution curves		
Upward light output ratio ULOR:	0%		
Downward light output ratio DLOR:	100%		
Glare index:	Between D5 and D6 (depending on the light distribution)		
Luminous intensity category:	Between G*4 and G*6 (depending on the light distribution)		
Luminous flux CIE n°3:	>95% (See 18 Light Distributions).		
Photobiological safety:	RG0 (exempt of risk)		
Initial luminous flux Tj=25°C (up to):	lm	9625	
Initial luminaire efficacy Tj=25°C (up to):	lm/W	162	
Real luminous flux Tj=85°C (UNE EN 13032-4) (up to):	lm	8493	
Real luminaire efficacy Tj=85°C (UNE EN 13032-4) (up to):	lm/W	142	

ELECTRIC SPECIFICATIONS:

Nominal maximum power (LEDs):	W	54	
Maximum power consumed (luminaire):	W	60	
Power range:	W	40W - 60W	
Maximum current of LED:	mA	<470 (LED Current = 50% Driver Current)	
Power supply protection classes IEC:	Class I and II		
Surge protection device (SPD):	Type 2 and Type 3, 10kV and 20kA transient surge protector. Series connection with thermal fuse disconnecter for a more effective protection at the end of its service life.		
Common and differential mode protection (SPD) Udc:	kV	10	
Max current (8/20) (SPD):	kA	20	
Thermal phase disconnection (SPD):	Yes		
Input voltage:	Vac	220-240	
Input voltage (max rate):	Vac	198-264	
Input frequency:	Hz	47-63	
Starting current:	A	<65	
Duration of the starting voltage peak:	ms	<0.3	
Driver efficacy:	>90%		
Power factor 100% consumption:	>0.98		
Power factor 50% consumption:	>0.95		
Total harmonic distortion (THD):	<10		
Power consumption on standby mode:	W	<0.4	
Energy class:	C (According to EU Regulation 2019/2015 EPREL) - A++ IPEA>1,15		

OPERATING CONDITIONS:

Average LED useful time L90B10:	hours	>100,000
Average driver useful life to Tp <70°C:	hours	100,000
Average luminaire useful life L90B10 (TM-21):	hours	72,167
Ambient temperature (Ta):	°C	From -35°C to +50°C
Aerodynamic resistance (CxS):	m2	0.042
Vibration test (15Hz 3 axis):		
Guarantee:	years	5 (extensible up to 10 years)

PACKAGING DIMENSIONS:

Net weight	kg	5.3
Gross weight	kg	6.2
Luminaire dimensions (LxWxH)	mm	525x250x80
Packaging dimensions (LxWxH)	mm	585x280x150
Pieces per box		1
Quantity per container 20ft		1200
Quantity per container 40ft		2310

CERTIFICATES:

Security certificates:	EN 60598-1 / EN 60598-2-3 / EN 62493 / IEC 62471
EMC certificates:	EN 55015 / EN 61547 / EN 61000-3-2 / EN 61000-3-3 / EN 61347-2-13 / EN 61347-1 / EN 62384
Other certifications:	IEC 62262 / EN 13032-4 / EN 62717 / EN 6272-1 / EN 6272-2-1 / EN 61643-11

Company Certifications



BENITO

info@benito.com
tel. 93 852 1000