




TH40D4

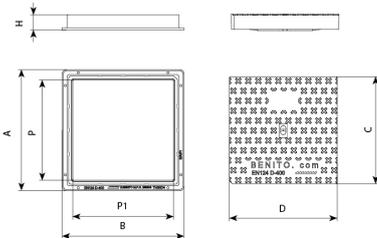

Hidráulica D4 is designed to support medium traffic. It is perfect for installing on roads with an ADT of 1.000-20.000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- One end is inserted to guarantee perfect placement.
- Groove to facilitate the opening process.
- Frame fitted with holes for fastening to the ground.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.
- Optional: security screw closure

| REF.   | A   | B   | H  | C   | D   | P   | P1  | UN. |
|--------|-----|-----|----|-----|-----|-----|-----|-----|
| TH80D4 | 790 | 790 | 75 | 720 | 720 | 690 | 690 |     |

[Project sheet](#) | [CAD](#) | [HD image](#)