





Designed to withstand medium traffic. Perfect for installation on roads with an ADT of 1,000-20,000, and in particular on road carriageways (including pedestrian streets), stabilised kerbstones and parking areas for all types of vehicles.

Complies with European standard EN-1433.  
Metal non-slip surface.  
Coated with non-toxic, non-flammable and environmentally safe black paint.  
Optional : Fixing system between the channel and the grate.

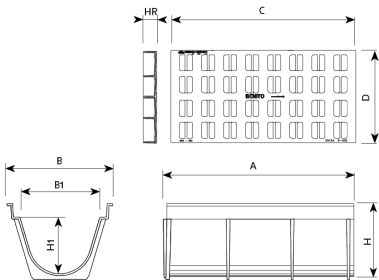

**IMPORTANT:**  
It is imperative to level the channels during their installation and Base like the side walls, a defective installation cancels all guarantee.

REF.	A	B	B1	H	H1	C	D	dm2	UN.
RC50 D400	980	550	415	395	300	980	490	16	10

[Project sheet](#) | [CAD](#) | [HD image](#)