




ENA2

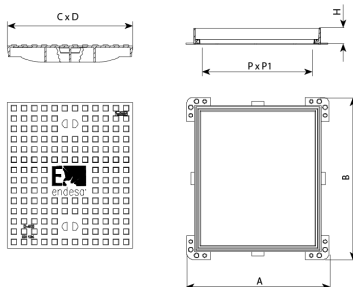

Endesa A1 is designed to withstand medium traffic. It is perfect for installing on roads with an ADT of 1,000-20,000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made of spheroidal graphite ductile iron, as per ISO 1083 (Type 500-7) and standard EN 1563.
- Complies with European standard UNE EN-124.
- Approved by the ENDESA company (ENEL Group)
- Includes sound insulation seal
- Groove for easier opening.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and environmentally safe black paint.

| REF. | A | B | H | C | D | P | P1 | UN. | |
|------|------|-----|-----|----|-----|-----|-----|-----|----|
| ENA1 | D400 | 725 | 825 | 80 | 620 | 720 | 576 | 676 | 10 |

[CAD](#) | [Certificate](#) | [HD image](#)