


ENA1

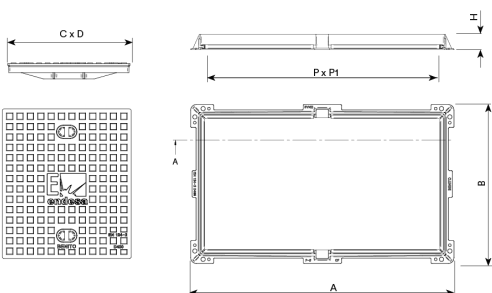

Endesa A2 is designed to withstand medium traffic. It is perfect for installing on roads with an ADT of 1,000-20,000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles

- Made of spheroidal graphite ductile iron, as per ISO 1083 (Type 500-7) and standard EN 1563.
- Complies with European standard UNE EN-124.
- Approved by the ENDESA company (ENEL Group) Includes reinforcing central removable.
- Groove for easier opening.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and environmentally safe black paint.

REF.	A	B	H	C	D	P	P1	UN.	
ENA2	D400	1365	825	80	620	720	1220	680	10

[Certificate](#) | [HD image](#)