


Flexible con LED Solar y Peana


HFLEXLEDSOLP

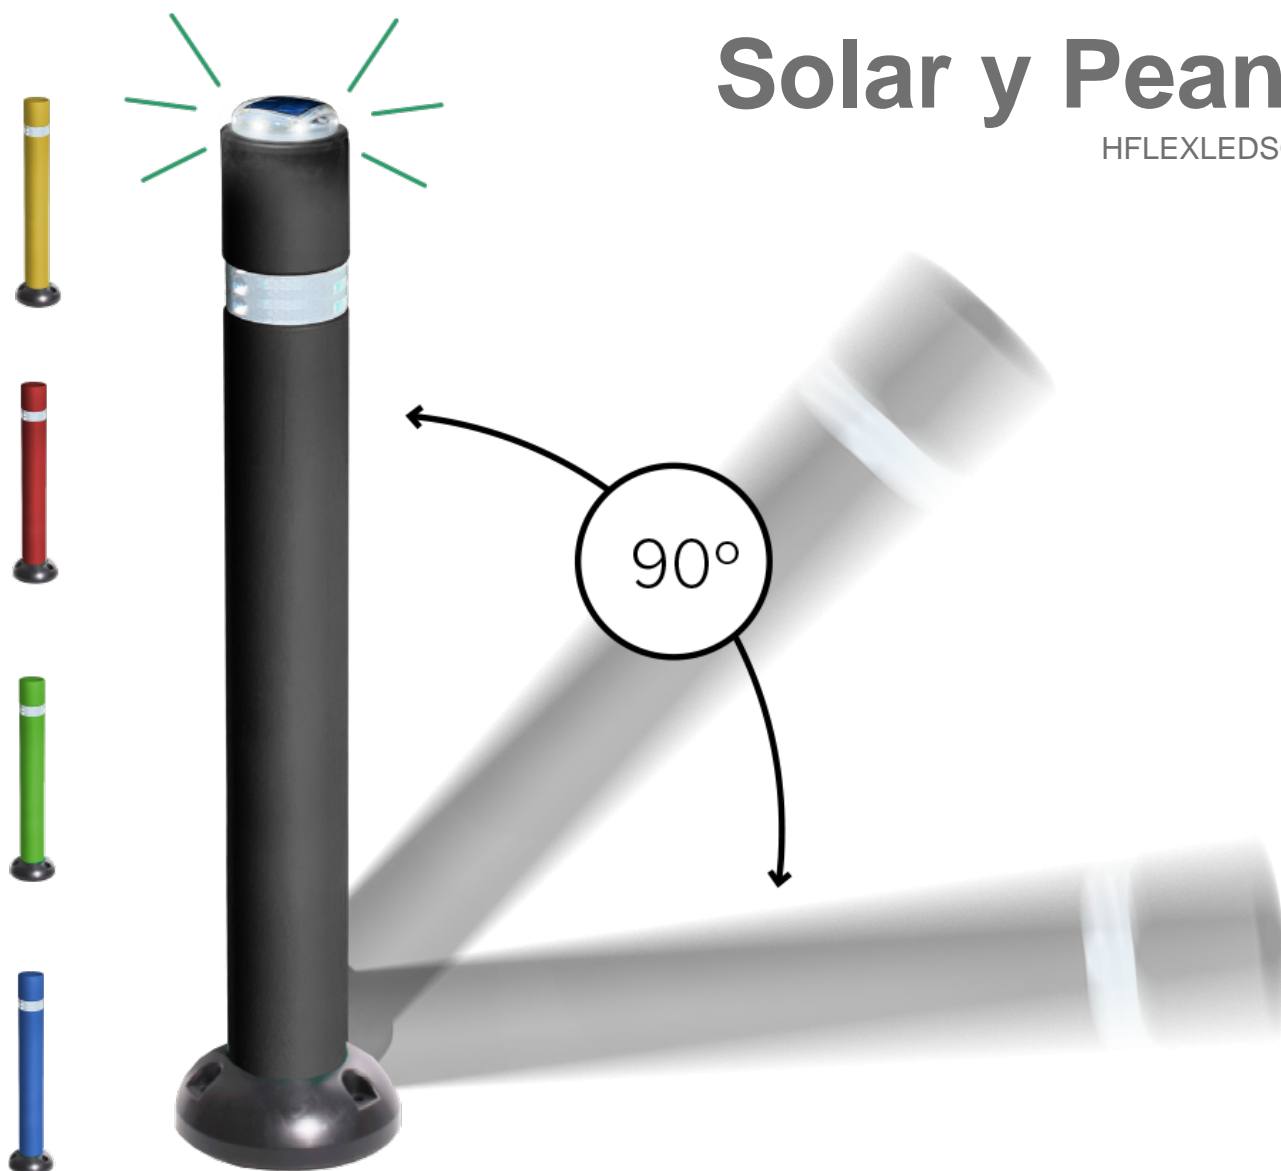

Luminous solar LED bollard made of flexible black polyurethane resistant to UV rays with reflective band. With base plate for a bolt-on installation. Manufactured in fixed and removable version with polyurethane or stainless steel base. Exceeds a flexion of 1500 cycles at 45° and 50 cycles at 90°, without damage.

Class "E" in terms of fire behaviour according to the UNE-EN 13501-1:2007+A1:2010 standard.

Resistant to -50° according to the UNE ISO 812 standard.



Ref.	Ø A	H	H1
HflexLEDsolP	100	840	195

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [Mounting instructions](#) | [HD image](#)



Recommended anchoring: by means of three Ø10 x 120mm bolts depending on the surface.

Optional:

- Other colours: red, green, yellow or blue.

