


Comunicación is designed to withstand medium traffic. It is perfect for installing on roads with an ADT of 1,000-20,000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made of spheroidal graphite ductile iron, as per ISO 1083 (Type 500-7) and standard EN 1563.
- Complies with European standard UNE EN-124.
- Includes sound insulation seal Metal non-slip surface.
- Coated with non-toxic, non-flammable and environmentally safe black paint.
- Includes key-operated safety lock (Ref. TL08).

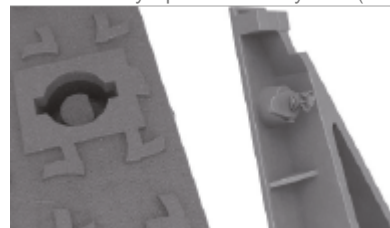

| REF.   | A    | B    | H    | C  | D    | P    | P1   | UN. |   |
|--------|------|------|------|----|------|------|------|-----|---|
| T1311N | D400 | 1255 | 1068 | 80 | 1230 | 1045 | 1100 | 910 | 6 |

[Project sheet](#) | [HD image](#)