





Bench with legs made of Ø40 mm steel tube. Seat and backrest made of 2 mm steel sheet perforated with Ø7 mm holes treated with Ferrus, a protective process that guarantees high resistance to corrosion.

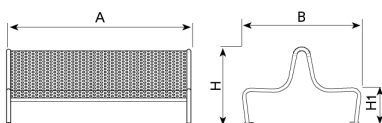

Ref.	A	B	H	H1
UM340	2065	760	855	430
UM340D	2080	1500	850	430
UM340B	2080	500	470	450



[Maintenance guide](#) | [Project sheet](#) | [CAD](#) | [Catalogue](#) | [Mounting instructions](#) | [HD image](#)

The Ferrus treatment consists of three layers applied after shot cleaning all impurities: an electrolytic bath, an epoxy coating and a grey RAL 9006 polyester paint coating.

Recommended anchoring: by means of M10 expansion bolts depending on the surface and the project.



The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.